

## ! IMPORTANT:


The product is powered by electricity. In order to avoid burns, fire and electric shock, please read the instructions carefully. Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty. Should you ever have any questions or feel you require help please contact your place of purchase for assistance.

**XTREON**

# ELECTRIC SIT-STAND DESK

## Instruction Manual

**LMS-14NWW**  
**LMS-14RBB**  
**LMS-14BG**

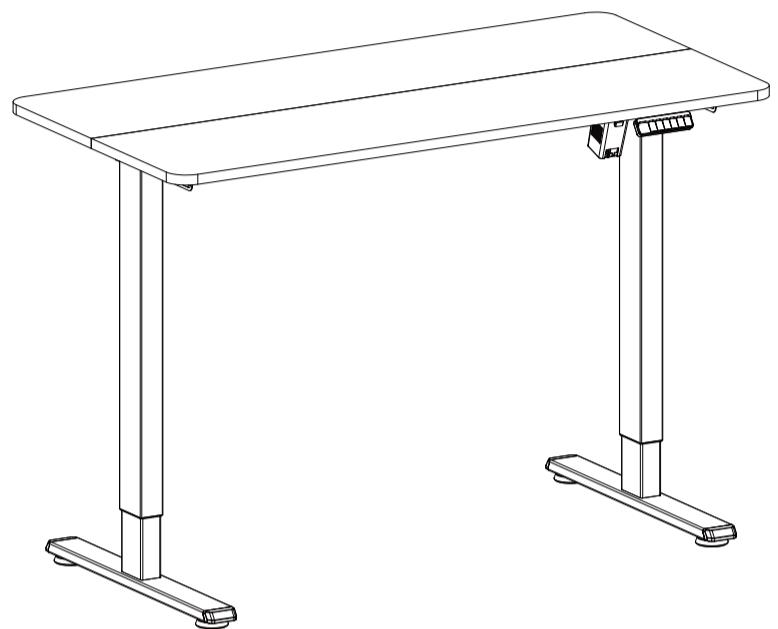

## ■ Other Cautions



Don't clean the product with water while the power is still connected.



Don't disassemble or replace components while the power is still connected.



Never operate the system with a damaged cord or plug.



Never operate the system if it's in moist environment or its electrical components have contact with liquids.




If the control box makes unusual noise or smells, switch off the mains voltage immediately.



**Disposal:** The product with this mark indicates that this product shouldn't be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the local recycle service or contact your point of purchase to withdraw the product.

## 7. Attaching to the Desktop


- Attaching the assembled desk frame to the desktop through the mounting holes found on the Side Brackets and Crossbar as shown in the illustration using 8 M6x16 Screws **S-A** and 2 ST4.2x16 Screws **S-F**.

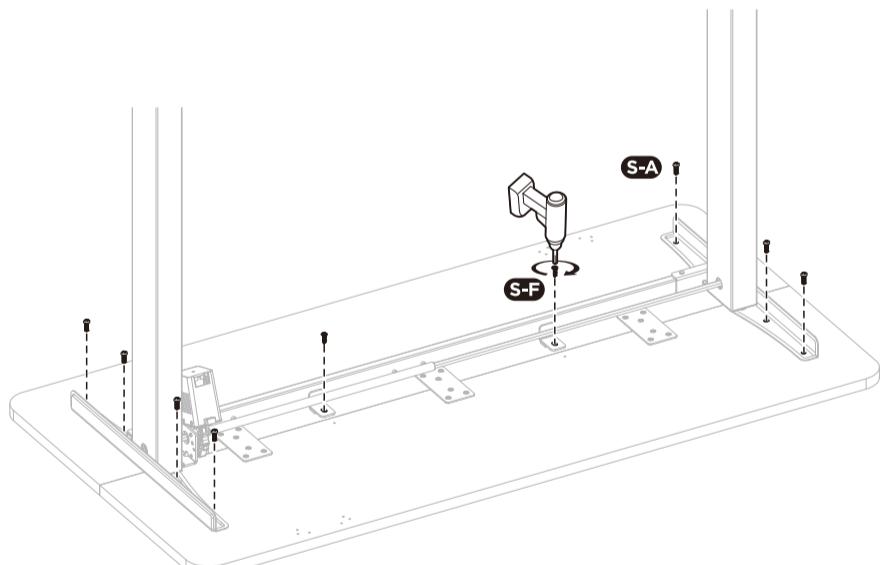

## 8. Connecting Cords


- Connect the **Controller** **J** with the **AC Adapter** **I** and motor as shown.

**Note:** Do not plug into the power before the desk is fully assembled.

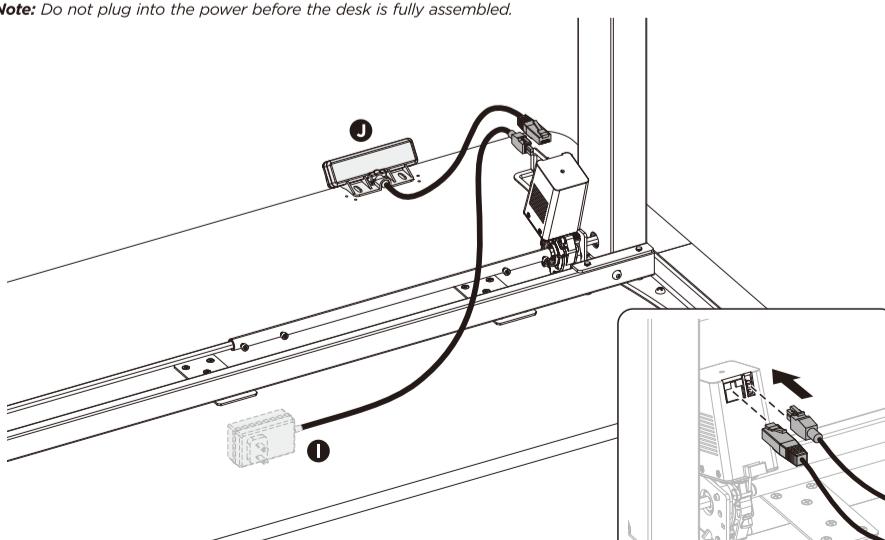

## 9. Attaching the Controller and Cable Tie

- Attach the Controller to the desktop using 2 ST4.2x13 Screws **S-E**.
- Run the cables through the **Cable Tie** **S-I** and attach the **Cable Tie** to the desktop with ST4.2x13 Screws **S-E** to ensure clean and neat surface.


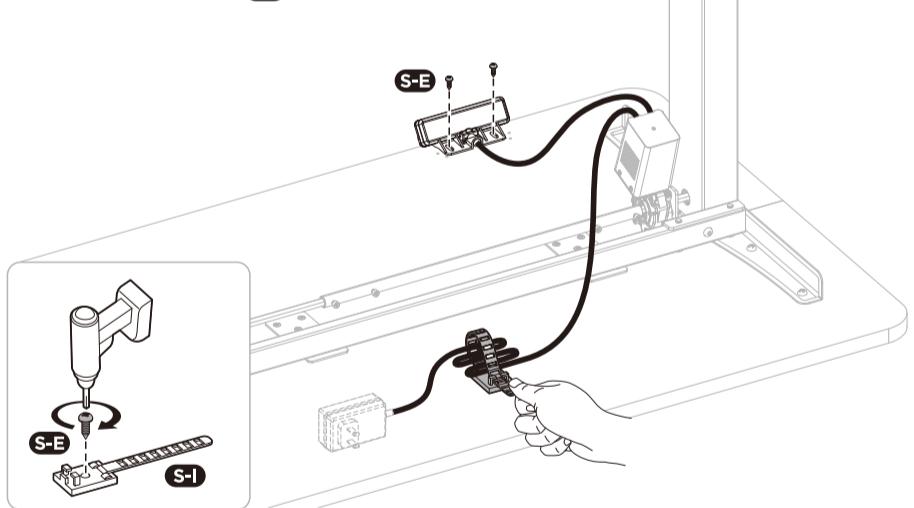


## 10. Adjusting the Desk

- There are two adjustable foot pads under each foot. If the floor isn't even, simply turn the pad to adjust the level to make the desk stable.


**Tip:** Use a bubble level (not included) to check if the desktop is even.

**CAUTION:** At least two people are required when turning over the desk, or serious bodily injuries might occur.

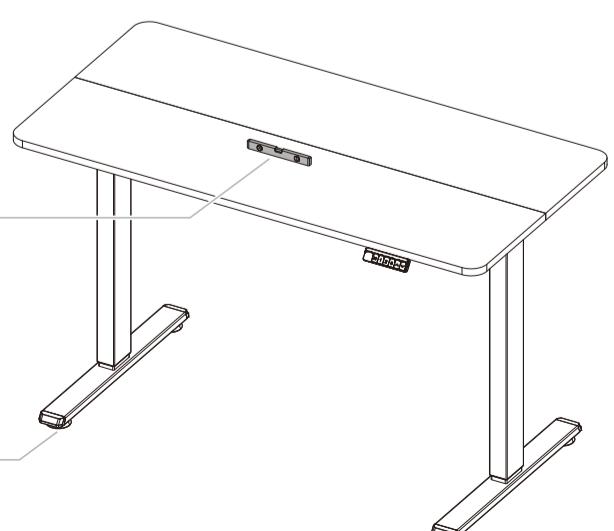

## Checklist and Installation

Please check all of the components shown in the component checklist. If any of the components are missing or damaged, contact your point of purchase for a replacement.

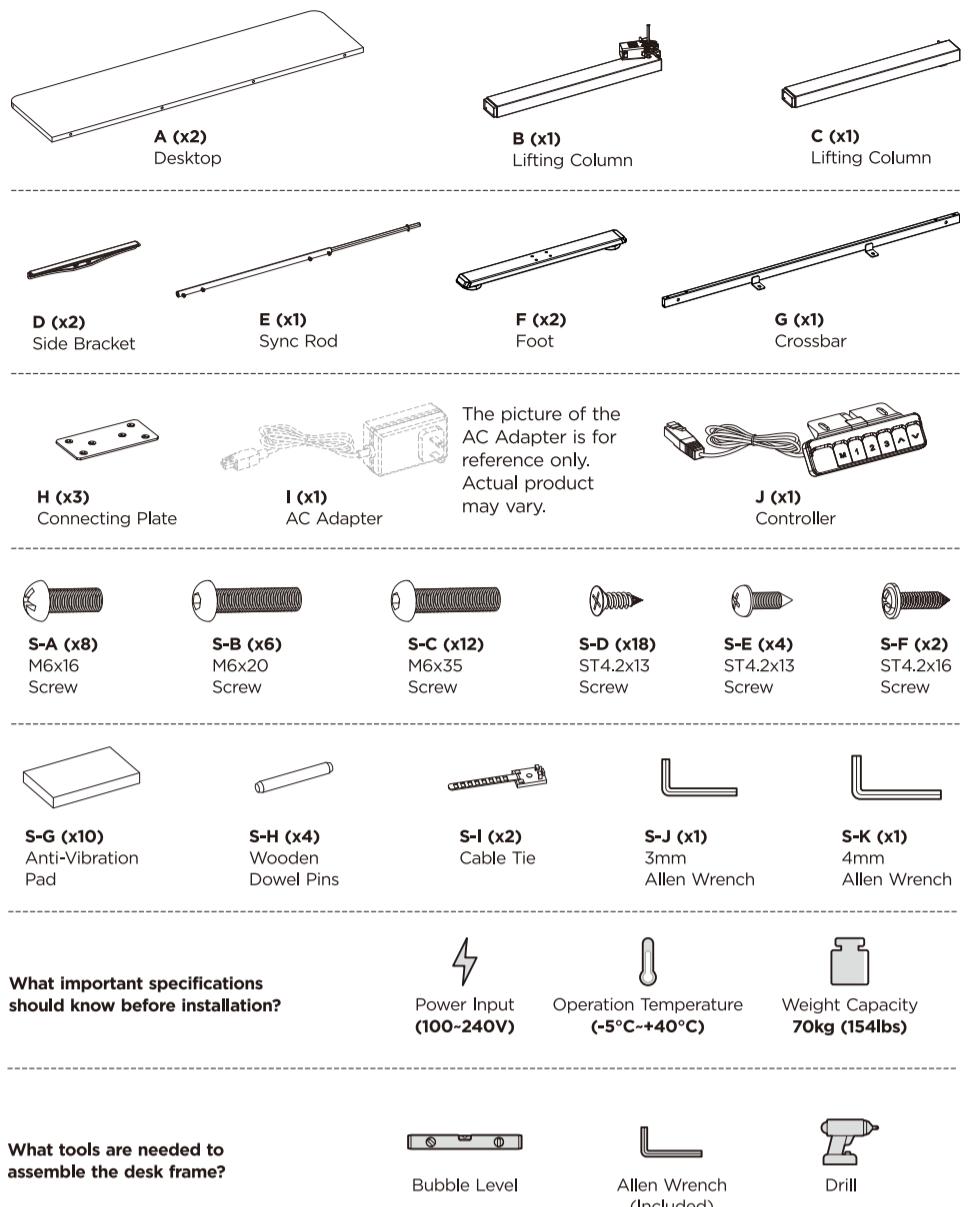


What tools are needed to assemble the desk frame?




### 1. Attaching the Crossbar

- Attach the Crossbar **G** to the Lifting Columns **B** / **C** using 4 M6x35 Screws **S-C** and 2 M6x20 Screws **S-B** as shown in the illustration.

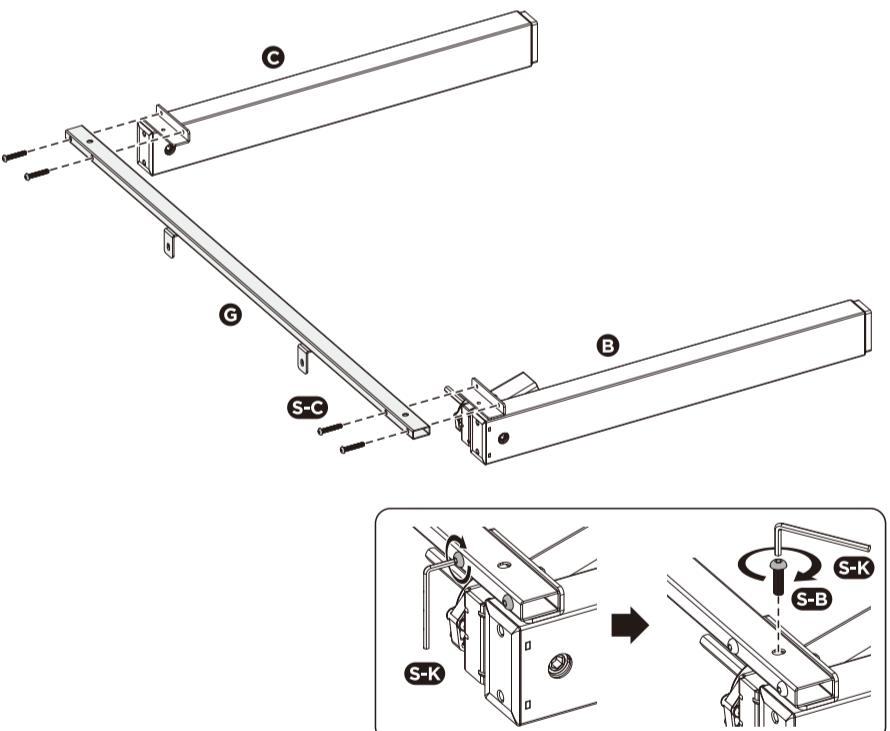


### 2. Attaching the Side Brackets

- Attach the Side Bracket **D** to the Lifting Column using 4 M6x20 Screws **S-B**.

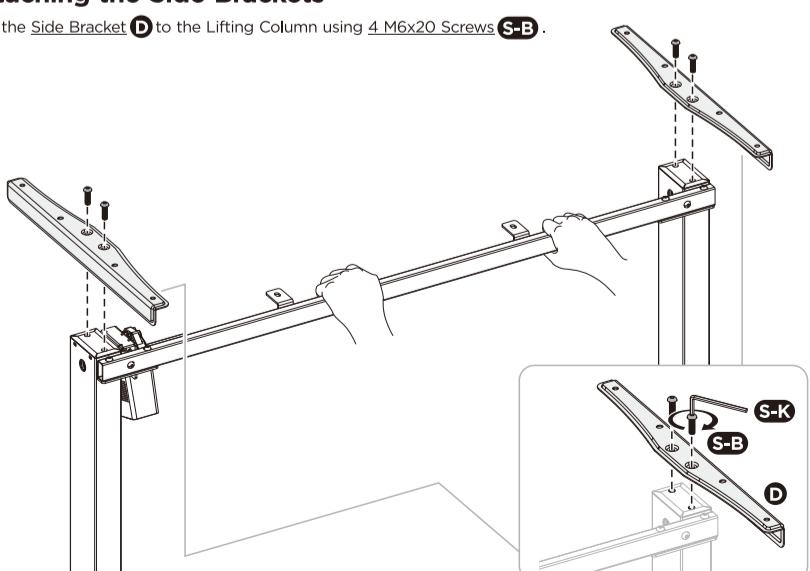


### 3. Attaching the Anti-Vibration Pads

- Attach the Anti-Vibration Pads **S-G** to the surface of the crossbar on the positions as shown.

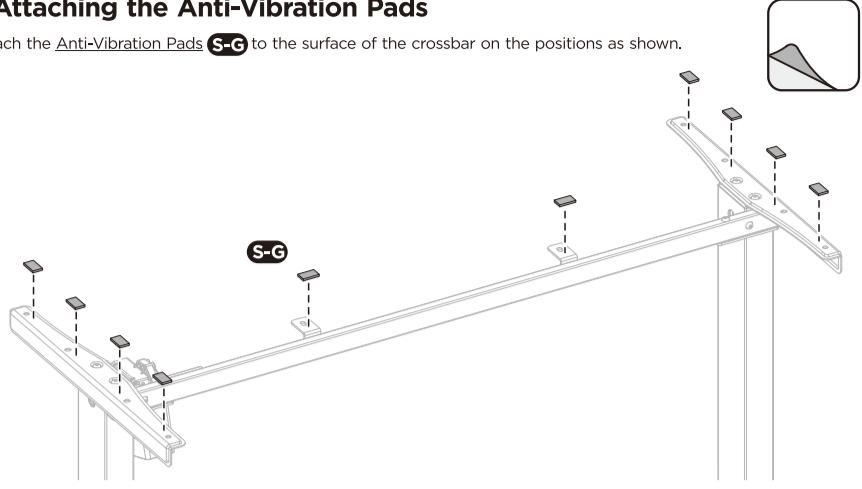

### 4. Attaching the Feet


- Place the Lifting Columns **B** / **C** upside down on the floor.
- Attaching the Foot **F** to the Lifting Column using 4 M6x35 Screws **S-C**.
- Repeat the same process to attach the other foot.

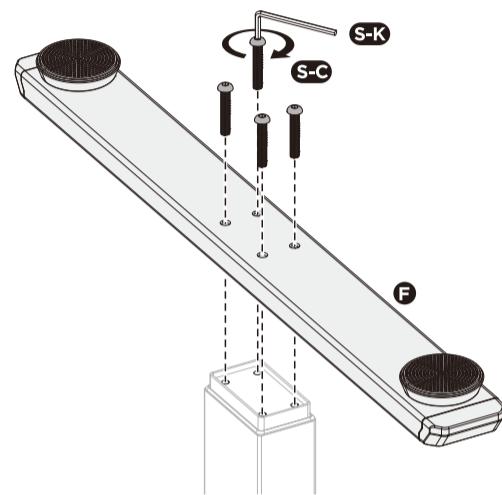

### 5. Assembling the Desktop

- Carefully place 2 pieces of Desktop **A** upside down on the floor as shown.
- Assemble the split desktop with 4 Wooden Dowel Pins **S-H** and 3 Connecting Plates **H** using 18 ST4.2x13 Screws **S-D**.

**Note:** Please make sure the desktop pieces keep facing down while installation.

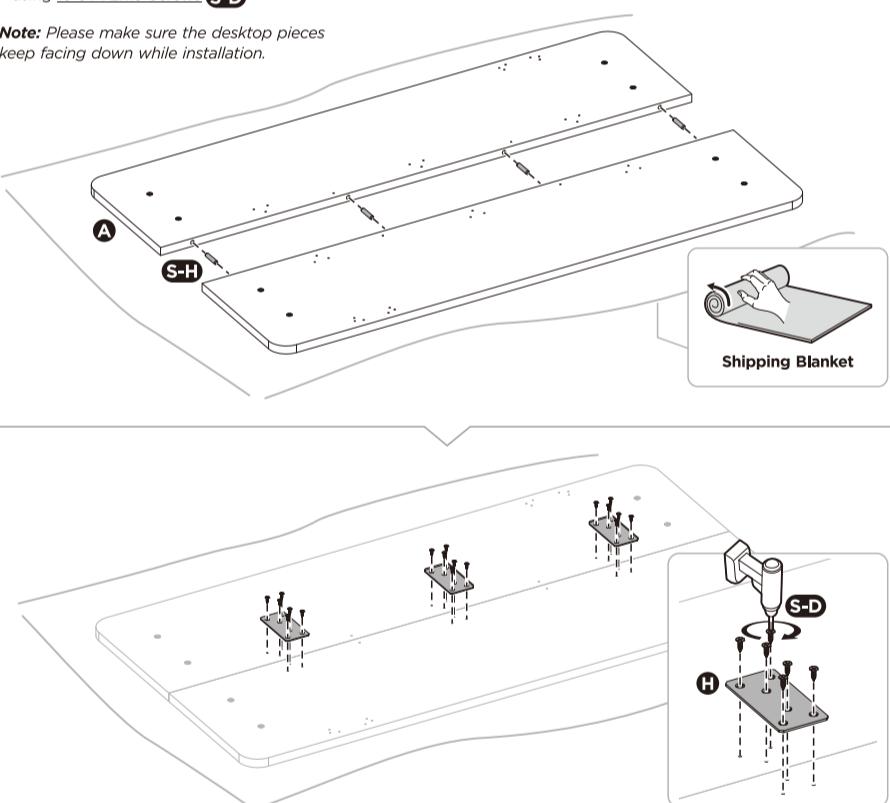

### 6. Attaching the Sync Rod

- Loose the 4 screws on the Sync Rod **E** and insert both ends of Sync Rod into holes found on the desk frame as shown in the illustration.
- Re-tighten the 4 screws of the assembled Sync Rod.

